

Phonopav disjuntor

Phonopav disjuntor is a **rubber granulate** element with special features designed to separate building structures in order to limit the transmission of noise through solids. Phonopav disjuntor is laid dry under the partitions for the total width of the masonry.

The product is easily cut using normal scissors or a cutter.

Item specifications

The soundproofing under the partition walls will be achieved through the supply and installation of a rubber granular disjuntor, thickness 3 mm.



Type:

Phonopav disjuntor by Thermak

m²

€/m²

SPECIFICATIONS	UM	VALUE
WIDTH	cm	14 - 20 - 25 - 33 - 40 - 50
LENGTH	m	15
PRODUCT THICKNESS	mm	3
DENSITY	kg/m ³	730

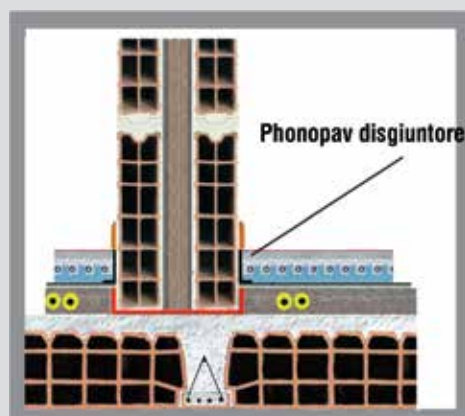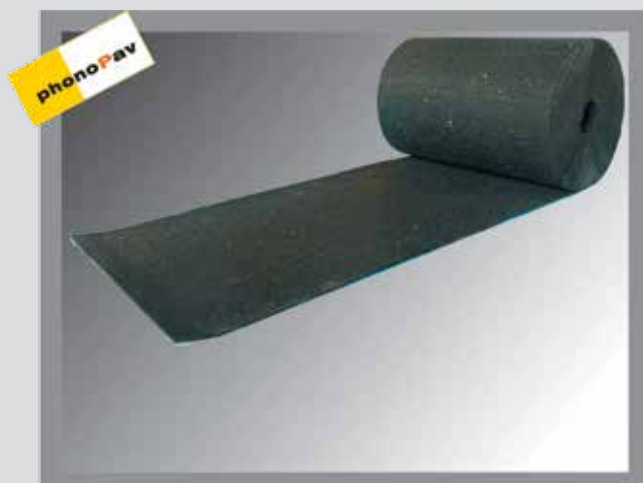

THERMAK
info@thermak.it
www.thermak.it

MATCO S.r.l.
 Via Quadrelli, 69
 37055 Ronco all'Adige (VR) - Italy
 Tel. +39.045.6608111